

Adding torrents using a Browser Extension

In this guide, we'll be setting up extensions that send torrent files from your browser to your remote client for downloading torrents without logging into your torrent client's web interface.

Installing the Extension

- Install the extension from these links
 - Chromium: [Remote Torrent Adder](#)
 - Firefox: [Torrent Control](#)

Setting Up


Remote Torrent Adder

- Once installed, right-click the extension and click **Options**.
- Then, a new tab appears with the Remote Torrent Adder setup page. Click the Add server button to add one. The following connection details are shown below:

ruTorrent

Server name: {any name}

Server type: ruTorrent WebUI

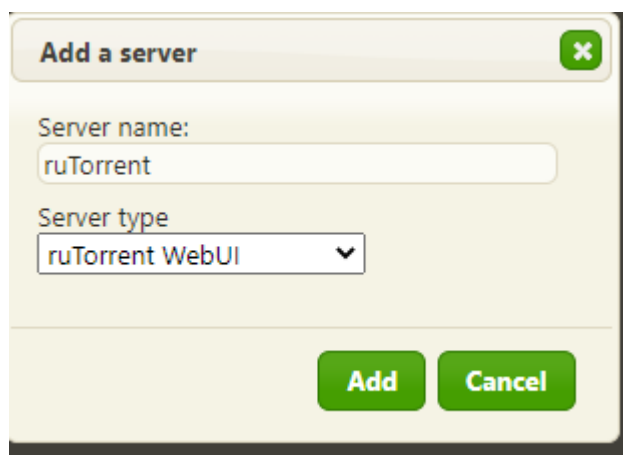

The screenshot shows a dialog box titled "Add a server" with a close button (X) in the top right corner. Inside the dialog, there is a text input field for "Server name:" containing the text "ruTorrent". Below it is a dropdown menu for "Server type:" with "ruTorrent WebUI" selected. At the bottom of the dialog are two green buttons: "Add" and "Cancel".

Host: {username}.{servername}.usbx.me
Port: 443
SSL: Checked
Username: {username}
Password: Password: As configured in UCP under ruTorrent
Relative Path: /rutorrent

::: info This will throw a `Server responded with an irregular HTTP code` when adding a torrent. You can safely ignore this error. :::

Deluge

Server name: {any name}
Server type: Deluge WebUI

Host: {username}.{servername}.usbx.me
Port: 443
SSL: Checked
Username: {username}
Password: Password: As configured in UCP under Deluge
Relative Path: /deluge

Transmission

Server name: {any name}
Server type: Transmission WebUI

Host: {username}.{servername}.usbx.me/transmission/rpc
Port: 443
SSL: Checked
Username: {username}
Password: Password: As configured in UCP under Transmission

qBittorrent

Server name: {any name}
Server type: qBittorrent v4.1+ WebUI
Host: {username}.{servername}.usbx.me
Port: 443/qbittorrent
SSL: Checked
Username: {username}

Password: As configured in UCP under qBittorrent

Torrent Control

- To set Torrent Control up, click the plugin icon. This will take you to its configuration page.
- To add a new server, go to Server Configuration
- On the Current server dropdown, select **New Server**

ruTorrent

Server name: {any name}

Bittorrent Client: ruTorrent

Server address: https://{username}.{servername}.usbx.me/rutorrent

Username: {username}

Password: As configured in UCP under ruTorrent

Click Save after configuring

Deluge

Server name: {any name}

Bittorrent Client: Deluge

Server address: https://{username}.{servername}.usbx.me/deluge

Password: As configured in UCP under Deluge

Click Save after configuring

Transmission

Server name: {any name}

Bittorrent Client: Transmission

Server address: https://{username}.{servername}.usbx.me/transmission/rpc

Username: {username}

Password: As configured in UCP under Transmission

Click Save after configuring

qBittorrent

Server name: {any name}

Bittorrent client: qBittorrent

Server address: https://{username}.{servername}.usbx.me/qbittorrent

Username: {username}

Password: As configured in UCP under qBittorrent

Revision #11

Created 27 February 2020 15:14:55

Updated 2 August 2022 12:28:35 by Raikiri